VEHICLE AND FRAME HEIGHT CHARTS

S/T MIDSIZE TRUCK

S/T 15403 Midsize Regular Cab Pickup 1

Heights (To Ground) 1

111.0” Wheelbase – S 15403 2

111.0” Wheelbase – T 15403 2

S/T 15653 Midsize Extended Cab Pickup 3

Heights (To Ground) 3

126.0” Wheelbase – S 15653 4

126.0” Wheelbase – T 15653 4

S/T 15643 Midsize Crew Cab Pickup 5

Heights (To Ground) 5

126.0” Wheelbase – S 15643 6

126.0” Wheelbase – T 15643 6

S/T 15603 Midsize Chassis Cab 7

Heights (To Ground) 7

126.0” Wheelbase – S 15603 8

C/K FULLSIZE TRUCK

C/K 10000/20000 Light Duty Fullsize Utility 9

Heights (To Ground) 9

116.0” Wheelbase – C 10706 10

130.0” Wheelbase – C 10906 11

116.0” Wheelbase – K 10706 12

130.0” Wheelbase – K 10906 13

130.0” Wheelbase – C 20906 13

130.0” Wheelbase – K 20906 14

VEHICLE AND FRAME HEIGHT CHARTS

C/K FULLSIZE TRUCK – *(Continued)*

C/K 10000/20000 Light Duty Fullsize Pickups 15
Heights (To Ground) 15
119.0” Wheelbase – C 10703 16
133.0” Wheelbase – C 10903 16
133.9” Wheelbase – C 10553 16
143.5” Wheelbase – C 10753 17
157.5” Wheelbase – C 10953 17
143.5” Wheelbase – C 10543 17
119.0” Wheelbase – K 10703 18
133.0” Wheelbase – K 10903 18
133.9” Wheelbase – K 10553 18
143.5” Wheelbase – K 10753 19
157.5” Wheelbase – K 10953 19
143.5” Wheelbase – K 10543 19
C/K 20000 Fullsize Pickups & Chassis-Cabs 20
Heights (To Ground) 20
133.0” Wheelbase – C 20903 21
143.5” Wheelbase – C 20753 22
157.5” Wheelbase – C 20953 23
153.0” Wheelbase – C 20743 24
167.0” Wheelbase – C 20943 25
133.0” Wheelbase – K 20903 26
143.5” Wheelbase – K 20753 27
157.5” Wheelbase – K 20953 28

VEHICLE AND FRAME HEIGHT CHARTS

C/K FULLSIZE TRUCK – *C/K 20000 Fullsize Pickups & Chassis-Cabs – (Continued)*

153.0” Wheelbase – K 20743 29

167.0” Wheelbase – K 20943 30

C/K 30000 Fullsize Pickups & Chassis-Cabs 31

Heights (To Ground)....31

133.0” Wheelbase – C 30903 32

157.5” Wheelbase – C 30953 33

167.0” Wheelbase – C 30943 34

133.0” Wheelbase – K 30903 35

157.5” Wheelbase – K 30953 36

167.0” Wheelbase – K 30943 37

C/K 31000 Fullsize Chassis-Cabs....38

Heights (To Ground)....38

137.0” Wheelbase – C 31003 39

161.5” Wheelbase – C 31053 40

161.5” Wheelbase – C 31403 41

137.0” Wheelbase – K 31003 42

161.5” Wheelbase – K 31053 43

161.5” Wheelbase – K 31403 44

G/H FULLSIZE VAN

G/H Full Body Van 45

Heights (To Ground)....45

135.0” Wheelbase – G 13405....46

135.0” Wheelbase – G 13406....46

135.0” Wheelbase – H 13405....47

VEHICLE AND FRAME HEIGHT CHARTS

G/H FULLSIZE VAN – *G/H Full Body Van – (Continued)*

135.0” Wheelbase – H 13406 47
135.0” Wheelbase – G 23405 48
135.0” Wheelbase – G 23406 48
155.0” Wheelbase – G 23705 49
135.0” Wheelbase – H 23405 49
135.0” Wheelbase – G 33405 50
135.0” Wheelbase – G 33406 50
155.0” Wheelbase – G 33705 50
155.0” Wheelbase – G 33706 51

G/H Fullsize Cutaway Van 52

Heights (To Ground) 52
139.0” Wheelbase – G 33503 53
159.0” Wheelbase – G 33803 53
177.0” Wheelbase – G 33903 54

U/X CROSSOVER SPORT VAN

U/X Crossover Sport Van 55

Heights (To Ground) 55
113.0” Wheelbase – U 11416 56
121.0” Wheelbase – U 12216 56

VEHICLE AND FRAME HEIGHT CHARTS

S/T 15403 Midsize Regular Cab Pickup

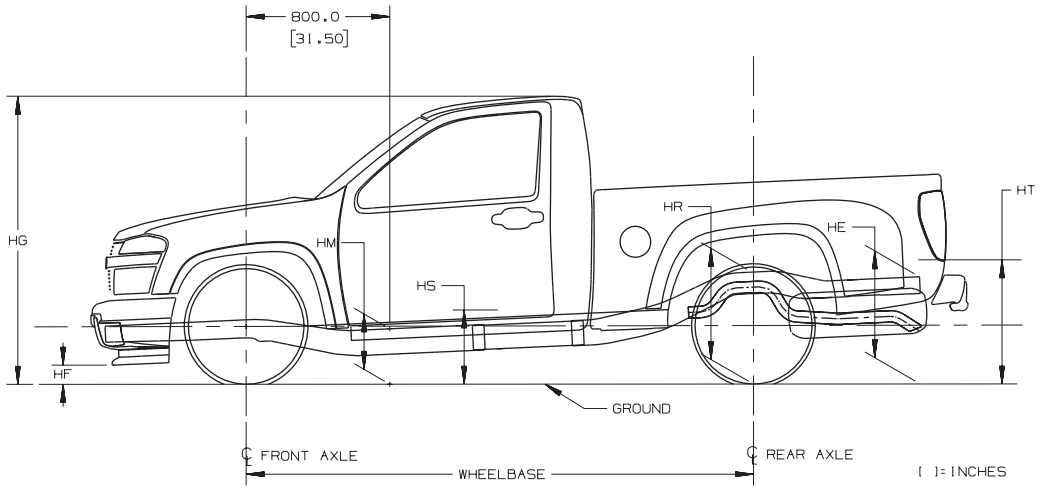

TD006095a

Heights (To Ground)

HF ..... Bottom of Front Air Deflector or Bumper

HG ..... Roof Height

HM ..... Normal Top of Frame

HP ..... Top of Tailgate (Down)

HR ..... Top of Frame at Centerline of Rear Axle

HS ..... Step H-Point-Front

HS2 ..... Step H-Point-Second

HT ..... Rear Cargo Load Height

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

S 15403	111.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 4400 **& ZQ8** P235/50R18	1896	1461	3357	2533	2447	–	10.0	63.8	13.9	–	24.3	17.6	–	26.5	–	7.9	62.1	12.1	–	21.7	15.8	–	22.6
[2] 4850 **& Z85** P225/75R15	1823	1448	3271	2533	2896	–	11.4	65.5	15.5	–	26.1	19.2	–	28.5	–	9.2	63.0	13.1	–	22.4	16.8	–	23.1
[2] 4850 **& Z85** P205/75R15	1823	1448	3271	2533	2896	–	10.9	65.0	15.0	–	25.7	18.7	–	28.0	–	8.7	62.5	12.6	–	21.9	16.3	–	22.5
[2] 5150 **& Z71** P265/75R15	1832	1517	3349	2753	2896	–	14.7	69.0	18.9	–	29.8	22.7	–	32.2	–	11.9	66.5	16.3	–	26.3	20.2	–	27.8

T 15403	111.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 5150 **& Z85** P235/75R15	2049	1610	3659	2753	2896	–	13.9	68.2	18.1	–	28.9	21.9	–	31.3	–	11.8	66.1	16.0	–	25.7	19.8	–	26.9
[2] 5150 **& Z71** P265/75R15	2074	1640	3714	2753	2896	–	14.6	68.9	18.8	–	29.7	22.6	–	32.1	–	12.6	66.9	16.8	–	26.5	20.6	–	27.7

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

S/T 15653 Midsize Extended Cab Pickup

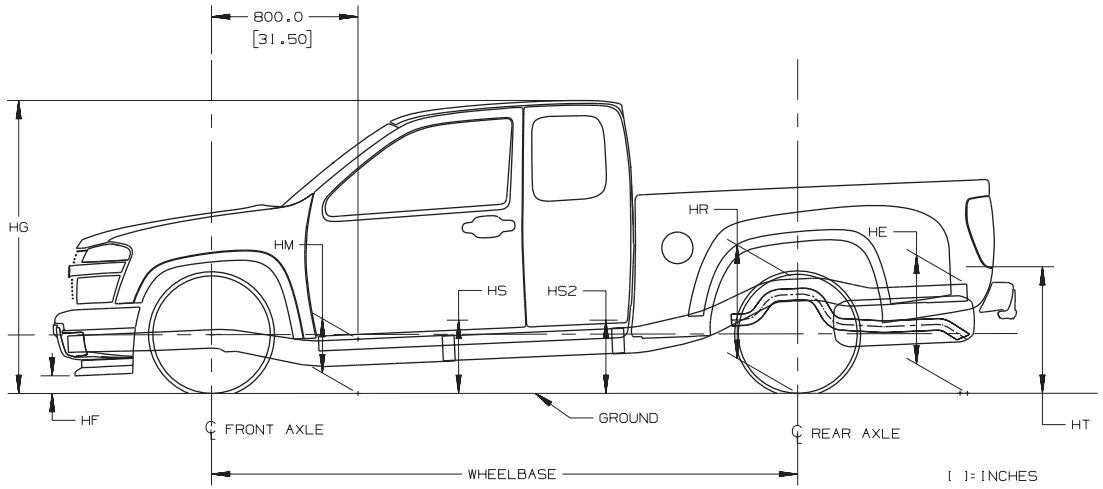

TD006095b

Heights (To Ground)

HF ..... **Bottom of Front Air Deflector or Bumper**

HG ..... **Roof Height**

HM ..... **Normal Top of Frame**

HP ..... **Top of Tailgate (Down)**

HR ..... **Top of Frame at Centerline of Rear Axle**

HS ..... **Step H-Point-Front**

HS2 ..... **Step H-Point-Second**

HT ..... **Rear Cargo Load Height**

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

S 15653	126.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 4600 **& ZQ8** P235/50R18	1945	1602	3547	2533	2447	—	10.1	64.0	13.8	—	24.3	17.4	17.7	26.0	—	8.2	62.3	12.1	—	21.9	15.7	16.0	23.1
[2] 5000 **& Z85** P225/75R15	1871	1593	3464	2533	2896	—	11.5	65.6	15.4	—	26.1	19.0	19.4	27.9	—	9.5	63.3	13.2	—	22.6	16.7	17.0	23.6
[2] 5000 **& Z85** P205/75R15	1871	1593	3464	2533	2896	—	11.1	65.1	14.9	—	25.6	18.6	18.9	27.4	—	9.0	62.8	12.7	—	22.1	16.2	16.5	23.1
[2] 5300 **& Z71** P265/75R15	1889	1673	3562	2753	2896	—	15.0	68.8	18.7	—	29.1	22.2	22.5	30.8	—	12.4	66.0	16.0	—	25.5	19.5	19.7	26.7

T 15653	126.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 5300 **& Z85** P235/75R15	2200	1649	3849	2753	2896	—	14.1	67.8	17.8	—	28.1	21.3	21.6	29.7	—	12.7	65.5	15.8	—	24.6	19.1	19.2	25.4
[1] 5300 **& Z71** P265/75R15	2224	1679	3903	2753	2896	—	14.9	68.5	18.5	—	28.7	22.0	22.2	30.4	—	13.5	66.3	16.6	—	25.3	19.9	20.0	26.1

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

S/T 15643 Midsize Crew Cab Pickup

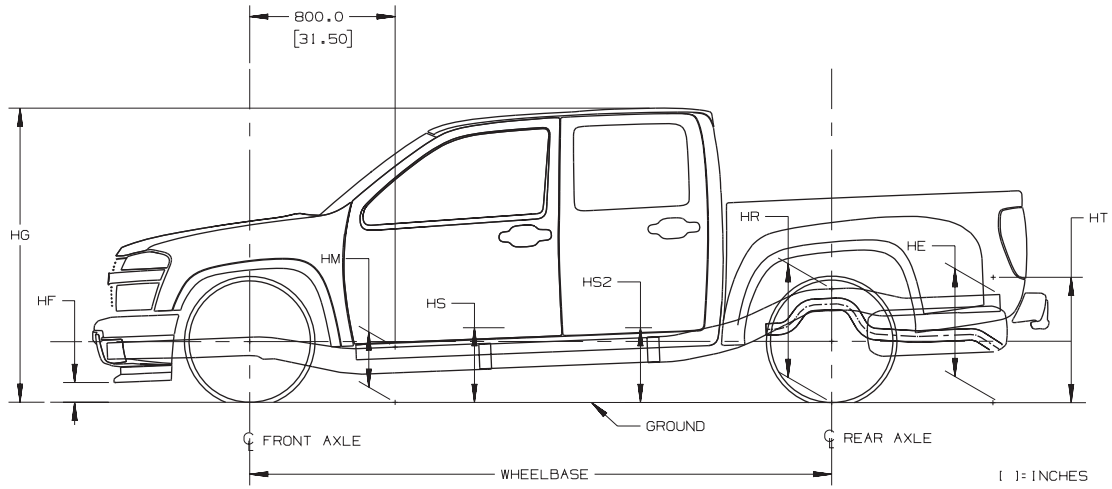

TD006095c

Heights (To Ground)

HF ..... **Bottom of Front Air Deflector or Bumper**

HG ..... **Roof Height**

HM ..... **Normal Top of Frame**

HP ..... **Top of Tailgate (Down)**

HR ..... **Top of Frame at Centerline of Rear Axle**

HS ..... **Step H-Point-Front**

HS2 ..... **Step H-Point-Second**

HT ..... **Rear Cargo Load Height**

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

S 15643	126.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 4900 **& ZQ8** P235/50R18	2056	1684	3740	2533	2447	–	10.1	64.3	13.8	–	24.3	17.4	17.9	26.0	–	8.7	62.4	12.2	–	22.0	15.6	16.0	23.4
[2] 5000 **& Z85** P225/75R15	1974	1661	3635	2533	2896	–	11.5	66.0	15.4	–	26.0	19.0	19.6	27.8	–	9.8	63.8	13.4	–	22.7	16.9	17.2	23.7
[2] 5300 **& Z71** P265/75R15	2010	1759	3769	2753	2896	–	14.9	69.1	18.6	–	29.1	22.2	22.7	30.8	–	12.7	66.6	16.3	–	25.7	19.8	20.0	26.8

T 15643	126.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 5300 **& Z85** P235/75R15	2097	1844	3941	2753	2896	–	14.2	68.1	17.8	–	28.0	21.3	21.7	29.6	–	12.3	65.9	15.7	–	24.9	19.2	19.3	25.9
[1] 5300 **& Z71** P265/75R15	2172	1882	4054	2753	2896	–	14.9	68.8	18.5	–	28.7	22.0	22.4	30.3	–	13.3	66.7	16.6	–	25.7	20.0	20.1	26.7

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

S/T 15603 Midsize Chassis Cab

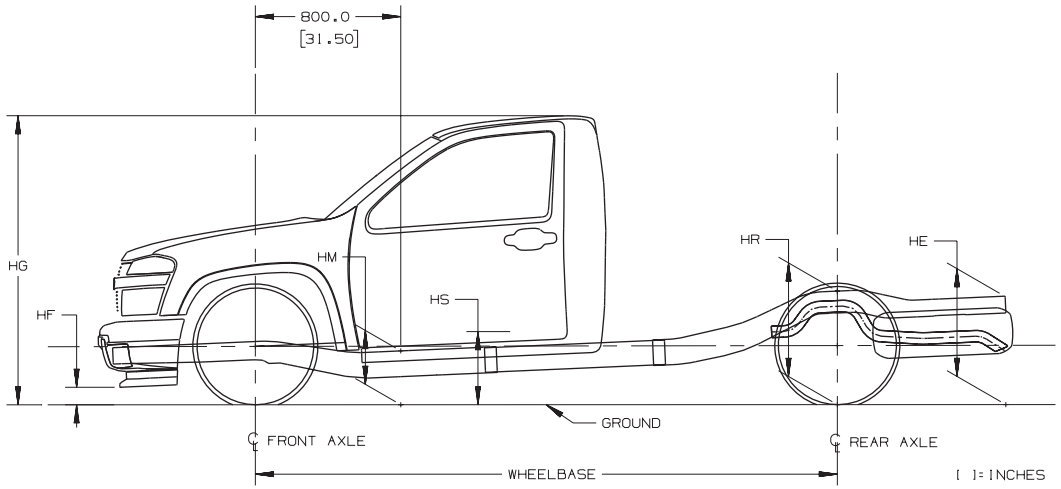

TD006095d

Heights (To Ground)

HF .....Bottom of Front Air Deflector or Bumper

HG ..... Roof Height

HM .....Normal Top of Frame

HP .....Top of Tailgate (Down)

HR ..... Top of Frame at Centerline of Rear Axle

HS .....Step H-Point-Front

HS2 .....Step H-Point-Second

HT.....Rear Cargo Load Height

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

S 15603	126.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
[1] 5300 **& Z71** P265/75R15	1967	1171	3138	2753	2896	–	14.7	68.8	18.8	–	29.5	22.6	–	–	–	12.6	65.9	16.2	–	25.8	19.7	–	–	23.1	30.4	22.0	–	25.3	–	–	–	–
[1] 5300 **& Z71** P235/75R15	1967	1171	3138	2753	2896	–	14.1	68.2	18.2	–	28.9	21.9	–	–	–	11.9	65.3	15.5	–	25.2	19.0	–	–	21.5	28.2	20.4	–	23.6	–	–	–	–

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

C/K 10000/20000 Light Duty Fullsize Utility

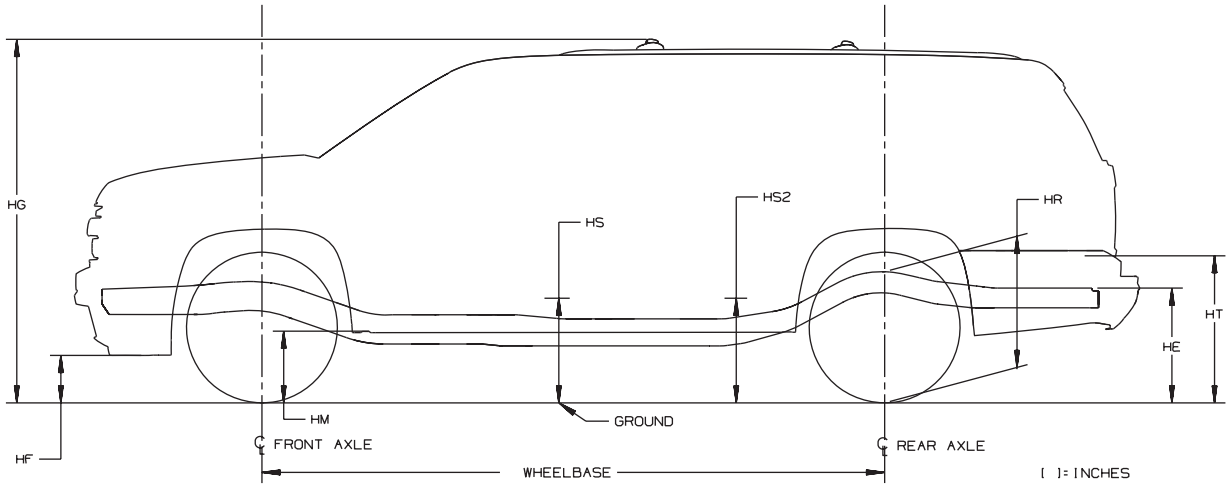

ANC35219.5

Heights (To Ground)

HF ..... Bottom of Front Facia or Air Deflector

HG ..... Roof Rack

HM ..... Chassis Datum Hole

HR ..... Top of Frame at Centerline of Rear Axle

HS ..... Step H-Point-Front

HS2 ..... Step H-Point-Second

HT ..... Rear Cargo Load Height

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

C 10706	116.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 7100 P265/65R18	2873	2688	5561	3200	4200	25.7	8.4	75.4	14.8	35.0	28.5	22.0	22.4	15.2	22.5	7.7	75.3	13.6	34.0	26.1	20.5	20.7	12.8
[2] 7200 **& Z55** P265/65R18	2974	2861	5835	3250	4200	25.0	8.4	75.0	14.6	34.3	28.0	21.7	22.0	14.5	23.7	7.7	75.0	13.8	33.5	27.0	20.9	21.1	13.5
[2] 6700 **& PPV** P255/60R17	2756	2493	5249	3200	3600	23.7	7.0	73.6	13.2	33.0	26.7	20.4	20.7	13.2	21.6	6.2	72.9	12.1	32.0	24.9	19.0	19.2	11.3
[2] 7100 **& Z55 & AS3** P275/55R20	2590	2610	5200	3200	4100	25.3	8.8	75.3	15.0	34.6	28.4	22.1	22.4	14.9	24.5	7.0	74.2	13.5	32.9	27.5	20.8	21.2	13.7
[2] 7100 **& Z55 & AS3** P265/70R17	2590	2610	5200	3200	4100	25.0	8.5	75.0	14.7	34.3	28.1	21.8	22.1	14.6	24.2	6.7	73.9	13.2	32.7	27.1	20.5	20.9	13.4
[2] 7000 **& Z55** P265/65R18	2687	2626	5313	3250	4100	25.1	8.5	75.0	14.6	34.4	28.1	21.8	22.1	14.6	24.3	7.0	74.4	13.3	32.9	27.1	20.6	21.0	13.7
[2] 7000 **& Z55** P265/65R18	2687	2626	5313	3250	4100	25.4	8.9	75.4	15.0	34.7	28.4	22.2	22.5	15.0	24.4	7.4	74.8	13.7	33.3	27.5	21.0	21.4	14.2
[2] 7100 **& ZW7 & AS3** P265/70R17	2590	2610	5200	3200	4100	25.6	8.4	75.3	14.7	34.9	28.5	22.0	22.4	15.1	22.6	7.0	74.2	13.0	33.3	25.9	20.0	20.3	12.6
[2] 7100 **& ZW7 & AS3** P275/55R20	2590	2610	5200	3200	4100	25.9	8.7	75.6	15.0	35.2	28.7	22.3	22.7	15.4	22.9	7.3	74.5	13.4	33.7	26.3	20.4	20.6	12.9

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

C 10906	130.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 7200 **& Z55** P265/70R17	2660	2527	5187	3300	4200	25.7	8.5	75.5	14.7	34.7	28.5	22.0	22.4	15.2	24.4	6.7	74.5	13.2	33.1	27.3	20.5	21.2	14.2
[1] 7200 **& Z55** P275/55R20	2660	2527	5187	3300	4200	25.9	8.7	75.8	15.0	35.0	28.8	22.2	22.7	15.4	24.8	7.0	74.5	13.5	33.3	27.7	20.8	21.5	14.5
[1] 7200 **& ZW7** P265/70R17	2736	2669	5405	3300	4200	25.6	8.4	75.4	14.7	34.7	28.6	21.9	22.4	15.1	21.6	6.8	74.7	12.8	32.9	25.3	19.7	20.0	12.2
[1] 7200 **& ZW7** P275/55R20	2736	2669	5405	3300	4200	25.9	8.7	75.7	14.9	34.9	28.7	22.2	22.6	15.4	22.0	7.1	75.0	13.1	33.2	25.6	20.0	20.3	12.6

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

K 10706	116.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
1) 7300 **& ZW7** P265/65R18	3063	2736	5799	3600	4200	26.1	8.3	75.5	14.8	35.5	28.8	22.1	22.6	15.6	22.9	7.0	75.5	13.4	34.2	26.4	20.5	20.9	13.6
2) 7400 **& Z55** P265/65R18	3124	2910	6034	3600	4200	25.4	8.3	75.2	14.6	34.8	28.3	21.9	22.2	14.9	24.2	7.0	75.0	13.5	33.5	27.3	20.8	21.3	14.2
2) 7300 **& Z55 & AS3** P265/70R17	2811	2635	5446	3600	4100	24.9	9.3	75.1	14.9	34.2	28.1	22.0	22.2	14.5	24.1	7.1	74.0	13.2	32.2	27.1	20.6	21.1	13.4
2) 7300 **& Z55 & AS3** P275/55R20	2811	2635	5446	3600	4100	25.2	9.7	75.4	15.2	34.5	28.4	22.3	22.5	14.8	24.4	7.4	74.3	13.5	32.5	27.5	20.9	21.4	13.7
2) 7100 **& Z55** P265/65R18	2844	2778	5622	3550	4100	24.9	9.4	75.1	14.9	34.1	28.0	21.9	22.1	14.4	23.7	7.3	74.7	13.3	32.3	27.0	20.6	21.1	13.9
2) 7100 **& Z55** P275/55R20	2844	2778	5622	3550	4100	25.2	9.6	75.4	15.2	34.4	28.3	22.2	22.4	14.7	20.4	7.6	74.9	13.6	32.6	27.3	20.9	21.4	14.2
2) 7100 **& Z55** P285/45R22	2841	2778	5619	3550	4100	25.3	9.7	75.5	15.3	34.5	28.4	22.3	22.5	14.8	24.1	7.7	75.0	13.7	32.7	27.4	21.0	21.5	14.3
2) 7300 **& ZW7 & AS3** P265/70R17	2809	2641	5450	3600	4100	26.0	9.2	75.7	15.1	35.3	28.8	22.3	22.7	15.5	23.1	7.1	74.6	13.1	33.3	26.4	20.4	20.8	13.6
2) 7300 **& ZW7 & AS3** P275/55R20	2809	2641	5450	3600	4100	26.3	9.5	76.0	15.4	35.6	29.1	22.6	23.0	15.8	23.4	7.5	74.9	13.4	33.6	26.7	20.7	21.1	13.9

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

K 10906	130.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
1) 7400 **& Z55** P265/70R17	2802	2597	5399	3600	4200	26.0	9.2	75.8	15.0	35.1	28.8	22.3	22.8	15.5	24.9	7.0	74.5	13.2	33.0	27.7	20.6	21.4	14.4
1) 7400 **& Z55** P275/55R20	2802	2597	5399	3600	4200	26.3	9.5	76.1	15.3	35.4	29.1	22.6	23.1	15.8	25.2	7.3	75.0	13.5	33.3	28.1	21.0	21.8	14.7
1) 7400 **& Z55** P265/65R18	2977	2875	5852	3600	4200	25.1	9.3	75.3	14.9	34.2	28.2	21.9	22.2	14.6	24.0	7.5	74.7	13.4	32.5	27.1	20.7	21.2	14.0
1) 7400 **& Z55** P275/55R20	2977	2875	5852	3600	4200	25.4	9.6	75.6	15.2	34.5	28.5	22.2	22.5	14.9	24.3	7.8	75.0	13.7	32.8	27.5	21.0	21.5	14.3
1) 7400 **& Z55** P285/45R22	2895	2672	5567	3600	4200	25.6	9.7	75.8	15.3	34.6	28.6	22.4	22.7	15.1	24.5	7.7	74.9	13.7	32.9	27.6	21.0	21.5	14.2
2) 7400 **& ZW7** P265/70R17	2878	2700	5578	3600	4200	26.0	9.2	75.8	15.0	35.1	28.8	22.2	22.8	15.5	22.1	7.1	74.9	12.9	32.9	25.7	20.0	20.4	13.1
2) 7400 **& ZW7** P275/55R20	2878	2700	5578	3600	4200	26.3	9.5	76.1	15.3	35.3	29.1	22.5	23.0	15.8	22.5	7.4	75.2	13.2	33.2	26.0	20.3	20.7	13.4

C 20906	130.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
1) 8400 **& Z55** LT245/75R16E																							
1) 8400 **& Z85** LT245/75R16E																							
2) 8400 **& Z85** LT265/70R17E																							

DATA NOT AVAILABLE AT TIME OF PUBLICATION

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

K 20906	130.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 8600 **& Z55** LT245/75R16E	2745	2665	5410	4180	5500	27.5	9.4	76.5	15.5	36.1	28.6	22.8	23.4	16.6	24.1	7.0	76.0	13.3	33.7	25.9	20.6	21.3	14.7
[1] 8600 **& Z85** LT245/75R16E	2977	2747	5724	4180	5500	27.3	9.3	76.3	15.4	35.8	28.4	22.6	23.3	16.3	24.1	7.3	76.2	13.6	33.9	26.0	20.8	21.5	14.7
[2] 8600 **& Z85** LT265/70R17E	2745	2665	5410	4180	5500	28.1	10.0	77.1	16.1	36.6	29.1	23.4	24.0	17.1	24.6	7.7	76.6	13.9	34.3	26.4	21.2	21.9	15.2

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

C/K 10000/20000 Light Duty Fullsize Pickups

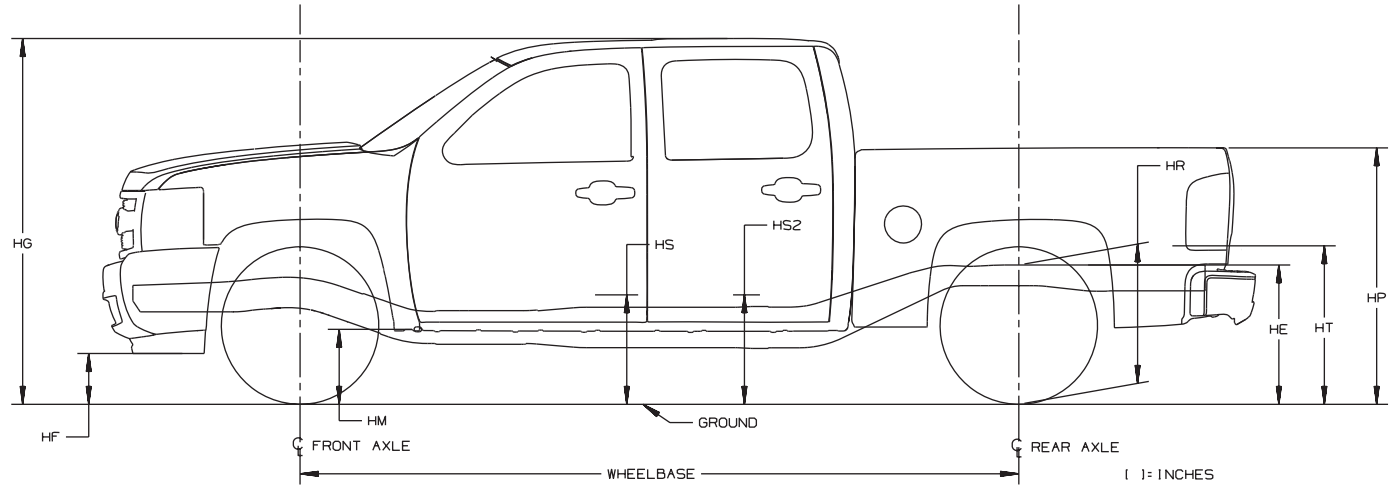

ANC35219.3

Heights (To Ground)

HE ..... **Top of Frame Rail at End**

HF ..... **Bottom of Front Air Deflector or Bumper**

HG ..... **Roof Height**

HM ..... **Chassis Datum Hole**

HP ..... **Top of Tailgate**

HR ..... **Top of Frame at Centerline of Rear Axle**

HS ..... **Step H-Point-Front**

HS2 ..... **Step H-Point-Second**

HT ..... **Rear Cargo Load Height**

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

C 10703	119.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
6400 **& Z83** P265/70R17	2456	1704	4160	3200	3750	32.2	9.0	74.1	15.3	55.7	31.1	23.2	—	36.3	26.5	7.4	71.3	13.1	49.9	26.6	20.5	—	30.3

C 10903	133.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
6400 **& Z83** P265/70R17	2535	1779	4314	3300	3750	32.0	9.0	73.7	15.1	55.4	30.9	22.9	—	36.1	26.4	7.3	71.2	13.0	49.8	26.6	20.4	—	30.2

C 10553	133.9" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 6600 P265/70R17	2676	1944	4620	3600	3950	31.3	9.0	73.8	15.0	54.7	30.4	22.6	23.2	35.3	26.0	6.8	71.4	12.7	49.3	26.3	20.2	20.7	29.7

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

C 10753	143.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
6800 **& –NHT** P265/70R17	2689	1858	4547	3600	3950	31.7	9.0	73.9	15.0	55.1	30.8	22.7	23.3	35.7	26.3	7.1	71.3	12.8	49.6	26.4	20.2	20.6	30.1
7000 **& NHT** P265/70R17	2826	1900	4726	3600	4200	31.8	8.9	73.8	15.0	55.3	30.8	22.7	23.3	35.9	26.3	7.3	71.3	12.9	49.7	26.5	20.2	20.7	30.1

C 10953	157.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
6900 **& Z83** P265/70R17	2917	1931	4848	3700	3950	31.3	9.0	73.5	14.9	54.8	30.5	22.4	22.9	35.3	26.0	7.3	71.2	12.9	49.4	26.3	20.2	20.5	29.8

C 10543	143.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
6800 **& Z83** P265/70R17	2880	2101	4981	3650	3950	30.7	9.0	74.1	14.9	54.1	30.0	22.3	23.0	34.7	26.0	7.3	71.9	13.0	49.4	26.3	20.3	20.7	29.8
7100 **& NHT** P265/70R17	2881	2123	5004	3650	4200	31.1	8.9	74.3	14.9	54.6	30.3	22.4	23.2	35.2	26.4	7.3	71.9	12.9	49.7	26.5	20.2	20.8	30.2

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

K 10703	119.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
6400 & Z83 P265/70R17	2678	1753	4431	3950	3750	31.9	9.3	74.1	15.5	55.4	30.9	23.3	—	36.0	26.2	6.3	71.8	12.8	49.6	26.6	20.9	—	29.9

K 10903	133.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
6800 & Z83 P265/70R17	2764	1819	4583	3950	3950	31.9	8.9	73.6	15.1	55.3	30.8	22.8	—	35.9	26.0	6.3	71.0	12.4	49.4	26.3	20.1	—	29.8

K 10553	133.9" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 6800 P265/70R17	2881	2035	4916	3950	3950	30.9	9.4	73.8	15.2	54.3	30.2	22.7	23.2	34.9	25.9	6.9	71.5	12.9	49.2	26.3	20.4	20.9	29.6

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

K 10753	143.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
7000 & –NHT P265/70R17	3058	1923	4981	3950	3950	31.2	9.3	73.9	15.2	54.7	30.5	22.7	23.3	35.3	25.9	7.5	71.5	13.2	49.3	26.3	20.4	20.8	29.7
7200 & NHT P265/70R17	3058	1940	4998	3950	4200	31.6	9.2	74.0	15.2	55.0	30.7	22.8	23.4	35.6	26.2	7.3	71.4	13.1	49.6	26.5	20.4	20.8	30.0

K 10953	157.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
7000 & Z83 P265/70R17	3146	2007	5153	3950	3950	31.0	9.4	73.6	15.1	54.4	30.2	22.5	23.0	35.0	25.9	7.6	71.5	13.2	49.2	26.3	20.4	20.8	29.6

K 10543	143.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
7000 & –NHT P265/70R17	2961	2081	5042	3950	3950	30.7	9.4	74.3	15.2	54.1	30.0	22.6	23.2	34.7	26.0	7.3	71.9	13.0	49.3	26.3	20.3	20.7	29.7
7300 & NHT P265/70R17	3137	2169	5306	3950	4200	30.6	9.3	74.2	15.1	54.0	30.0	22.5	23.1	34.6	26.1	7.6	72.0	13.2	49.5	26.4	20.4	20.9	29.9

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

C/K 20000 Fullsize Pickups & Chassis-Cabs

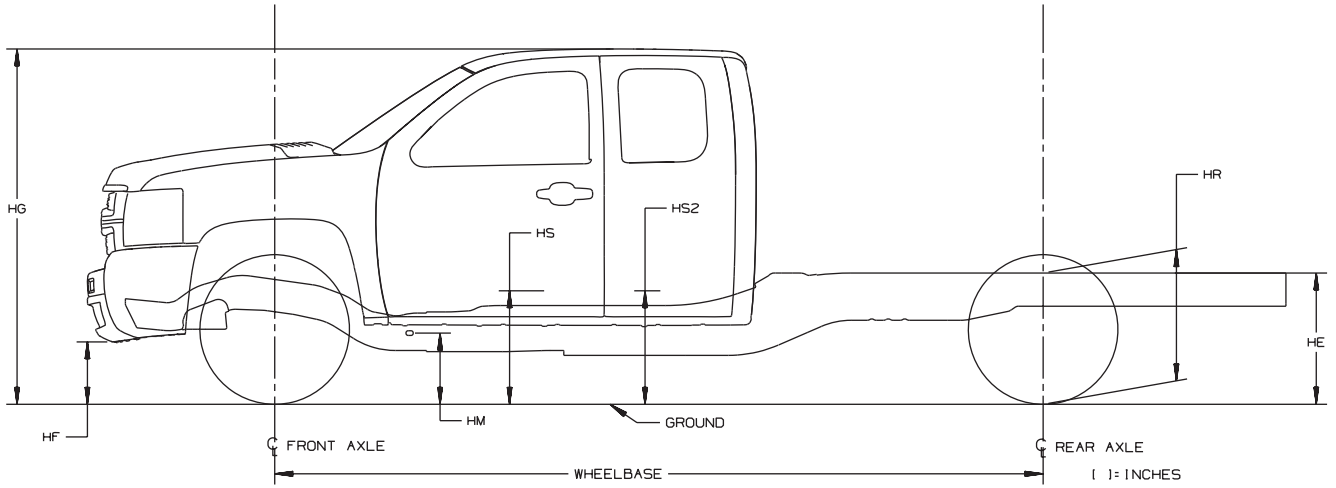

ANC35219.4

Heights (To Ground)

HE ..... **Top of Frame Rail at End**

HF ..... **Bottom of Front Air Deflector or Bumper**

HG ..... **Roof Height**

HM ..... **Chassis Datum Hole**

HR ..... **Top of Frame at Centerline of Rear Axle**

HS ..... **Step H-Point-Front**

HS2 ..... **Step H-Point-Second**

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

C 20903	133.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9200 lb. **LY6 & X88** LT265/70R17	3025	2111	5136	4411	6084	37.7	14.7	79.1	18.4	61.2	36.4	28.2	—	41.8	32.3	12.8	76.5	16.2	55.8	32.3	25.7	—	36.2
9200 lb. **LY6 & Z88** LT265/70R17 at 50 PSI Rear	3025	2111	5136	4411	6084	37.7	14.3	79.1	18.4	61.2	36.4	28.2	—	41.8	32.3	12.4	76.5	16.2	55.8	32.3	25.7	—	36.2
9200 lb. **LMM & X88** LT265/70R17	3560	2182	5742	4411	6084	37.6	14.5	79.0	18.3	61.1	36.3	28.1	—	41.7	32.1	13.7	76.8	16.7	55.5	32.3	26.0	—	36.0
9200 lb. **LMM & Z88** LT265/70R17 at 50 PSI Rear	3560	2182	5742	4411	6084	37.6	14.1	79.0	18.3	61.1	36.3	28.1	—	41.7	32.1	13.3	76.8	16.7	55.5	32.3	26.0	—	36.0

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

C 20753	143.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9200 lb. **LY6 & X88** LT265/70R17	3135	2289	5424	4411	6084	37.2	14.8	79.2	18.3	60.7	36.2	28.0	28.7	41.3	32.3	13.1	76.8	16.2	55.7	32.3	25.7	26.1	36.2
9200 lb. **LY6 & X88** LT265/70R17 at 50 PSI Rear	3135	2289	5424	4411	6084	37.2	14.4	79.2	18.3	60.7	36.2	28.0	28.7	41.3	32.3	12.6	76.8	16.2	55.7	32.3	25.7	26.1	36.2
9200 lb. **LMM & Z88** LT265/70R17	3786	2360	6146	4411	6084	37.1	14.6	79.0	18.2	60.6	36.1	27.8	28.6	41.2	32.1	14.1	77.2	16.9	55.5	32.3	26.1	26.3	35.9
9200 lb. **LMM & Z88** LT265/70R17 at 50 PSI Rear	3786	2360	6146	4411	6084	37.1	14.1	79.0	18.2	60.6	36.1	27.8	28.6	41.2	32.1	13.7	77.2	16.9	55.5	32.3	26.1	26.3	35.9

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

C 20953	157.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9200 lb. **LY6 & X88** LT265/70R17	3210	2305	5515	4500	6084	37.2	14.8	79.0	18.2	60.7	36.2	27.8	28.5	41.4	32.3	13.1	76.6	16.2	55.7	32.3	25.3	26.0	36.1
9200 lb. **LY6 & Z88** LT265/70R17 at 50 PSI Rear	3210	2305	5515	4500	6084	37.2	14.4	79.0	18.2	60.7	36.2	27.8	28.5	41.4	32.3	12.6	76.6	16.2	55.7	32.3	25.3	26.0	36.1
9200 lb. **LMM & X88** LT265/70R17	3849	2389	6238	4500	6084	37.1	14.6	78.8	18.1	60.6	36.1	27.7	28.4	41.2	32.1	14.0	77.1	16.8	55.5	32.3	26.1	26.4	35.9
9200 lb. **LMM & Z88** LT265/70R17 at 50 PSI Rear	3849	2389	6238	4500	6084	37.1	14.2	78.8	18.1	60.6	36.1	27.7	28.4	41.2	32.1	13.6	77.1	16.8	55.5	32.3	26.1	26.4	35.9

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

C 20743	153.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9200 lb. **LY6 & X88** LT225/75R17	3148	2374	5522	4670	6084	37.0	14.9	79.7	18.2	60.5	36.1	27.8	28.8	41.1	32.3	12.6	77.2	15.9	55.7	32.3	25.4	26.2	36.2
9200 lb. **LY6 & Z88** LT225/75R17 at 65 PSI Rear	3148	2374	5522	4670	6084	37.0	14.4	79.7	18.2	6035	36.1	27.8	28.8	41.0	32.3	12.2	77.2	15.9	55.7	32.3	25.4	26.2	35.9
9200 lb. **LMM & X88** LT265/70R17	3777	2446	6223	4670	6084	36.9	14.7	79.6	18.1	60.4	36.0	27.7	28.7	41.0	32.1	13.5	77.6	16.6	55.5	32.3	25.9	26.5	35.9
9200 lb. **LMM & Z88** LT265/70R17 at 50 PSI Rear	3777	2446	6223	4670	6084	36.9	14.2	79.6	18.1	60.4	36.0	27.7	28.7	41.0	32.1	13.1	77.6	16.6	55.5	32.3	25.9	26.5	35.9

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

C 20943	167.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9200 lb. **LY6 & X88** LT265/70R17	3230	2387	5617	4800	6084	37.0	14.9	79.5	18.2	60.5	36.1	27.7	28.6	41.1	32.3	12.5	77.1	15.8	55.7	32.3	25.3	26.1	36.1
9200 lb. **LY6 & Z88** LT265/70R17 at 50 PSI Rear	3230	2387	5617	4800	6084	37.0	14.5	79.5	18.2	60.5	36.1	27.7	28.6	41.1	32.3	12.1	77.1	15.8	55.7	32.3	25.3	26.1	36.1
9200 lb. **LMM & X88** LT265/70R17	3841	2456	6297	4800	6084	36.9	14.7	79.4	18.0	60.4	36.0	27.6	28.5	41.0	32.1	13.4	77.5	16.4	55.5	32.3	25.8	26.4	35.9
9200 lb. **LMM & Z88** LT265/70R17 at 50 PSI Rear	3841	2456	6297	4800	6084	36.9	14.3	79.4	18.0	60.4	36.0	27.6	28.5	41.0	32.1	13.0	77.5	16.4	55.5	32.3	25.8	26.4	35.9

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

K 20903	133.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9200 lb. **LY6 & X88** LT265/70R17 at 50 PSI Rear	3173	2124	5297	4500	6084	37.7	14.7	79.0	18.4	61.2	36.4	28.2	—	41.8	32.3	12.9	76.5	16.2	55.7	32.3	25.7	—	36.1
9200 lb. **LY6 & Z88** LT265/70R17 at 50 PSI Rear	3173	2124	5297	4500	6084	37.7	14.2	79.0	18.4	61.2	36.4	28.2	—	41.7	32.3	12.5	76.5	16.2	55.7	32.3	25.7	—	35.8
9200 lb. **LMM & X88** LT265/70R17 at 50 PSI Rear	3772	2197	5969	4500	6084	37.6	14.5	78.9	18.3	61.1	36.3	28.0	—	41.7	32.0	13.8	76.9	16.8	55.4	32.3	26.1	—	35.8
9200 lb. **LMM & Z88** LT265/70R17 at 50 PSI Rear	3772	2197	5969	4500	6084	37.6	14.0	78.9	18.3	61.1	36.3	28.0	—	41.7	32.0	13.4	76.9	16.8	55.4	32.3	26.1	—	35.8

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

K 20753	143.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9200 lb. **LY6 & X88** LT265/70R17 at 50 PSI Rear	3421	2252	5673	4500	6084	37.2	14.7	79.1	18.3	60.7	36.2	27.9	28.7	41.4	32.2	13.3	76.9	16.4	55.6	32.3	25.8	26.2	36.1
9200 lb. **LY6 & Z88** LT265/70R17 at 50 PSI Rear	3421	2252	5673	4500	6084	37.2	14.3	79.1	18.3	60.7	36.2	27.9	28.7	41.4	32.2	12.9	76.9	16.4	55.6	32.3	25.8	26.2	36.1
9200 lb. **LMM & X88** LT265/70R17 at 50 PSI Rear	4083	2327	6410	4500	6084	37.2	14.4	79.0	18.1	60.7	36.1	27.8	28.6	41.3	32.0	14.3	77.3	17.1	55.4	32.3	26.3	26.4	35.8
9200 lb. **LMM & Z88** LT265/70R17 at 50 PSI Rear	4083	2327	6410	4500	6084	37.2	14.0	79.0	18.1	60.7	36.1	27.8	28.6	41.3	32.0	13.9	77.3	17.1	55.4	32.3	26.3	26.4	35.8

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

K 20953	157.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9200 lb. **LY6 & X88** LT265/70R17 at 50 PSI Rear	3464	2319	5783	4670	6084	37.2	14.8	78.9	18.2	60.7	36.1	27.8	28.5	41.3	32.2	13.1	76.7	16.2	55.6	32.3	25.6	26.1	36.0
9200 lb. **LY6 & Z88** LT265/70R17 at 50 PSI Rear	3464	2319	5783	4670	6084	37.2	14.3	78.9	18.2	60.7	36.1	27.8	28.5	41.3	32.2	12.7	76.7	16.2	55.6	32.3	25.6	26.1	36.0
9200 lb. **LMM & X88** LT265/70R17 at 50 PSI Rear	4113	2395	6508	4670	6084	37.1	14.5	78.8	18.0	60.6	36.0	27.6	28.4	41.2	32.0	14.1	77.2	16.9	55.4	32.3	26.1	26.3	35.8
9200 lb. **LMM & Z88** LT265/70R17 at 50 PSI Rear	4113	2395	6508	4670	6084	37.1	14.1	78.8	18.0	60.6	36.0	27.6	28.4	41.2	32.0	13.7	77.2	16.9	55.4	32.3	26.1	26.3	35.8

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

K 20743	153.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9200 lb. **LY6 & X88** LT265/70R17 at 50 PSI Rear	3384	2371	5755	4670	6084	37.0	14.8	79.7	18.2	60.5	36.1	27.8	28.8	41.1	32.2	12.9	77.4	16.2	55.6	32.3	25.6	26.3	36.1
9200 lb. **LY6 & Z88** LT265/70R17 at 50 PSI Rear	3384	2371	5755	4670	6084	37.0	14.4	79.7	18.2	60.5	36.1	27.8	28.8	41.1	32.2	12.5	77.4	16.2	55.6	32.3	25.6	26.3	36.1
9200 lb. **LMM & X88** LT265/70R17 at 50 PSI Rear	4015	2440	6455	4670	6084	36.9	14.6	79.6	18.1	60.4	36.0	27.7	28.7	41.0	32.0	13.9	77.7	16.8	55.4	32.3	26.1	26.6	35.8
9200 lb. **LMM & Z88** LT265/70R17 at 50 PSI Rear	4015	2440	6455	4670	6084	36.9	14.1	79.6	18.1	60.4	36.0	27.7	28.7	41.0	32.0	13.5	77.7	16.8	55.4	32.3	26.1	26.6	35.8

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

K 20943	167.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9200 lb. **LY6 & X88** LT265/70R17 at 50 PSI Rear	3463	2427	5890	4800	6084	37.0	14.8	79.5	18.1	60.4	36.0	27.6	28.6	41.0	32.2	12.9	77.2	16.1	55.6	32.3	25.2	26.2	36.1
9200 lb. **LY6 & Z88** LT265/70R17 at 50 PSI Rear	3463	2427	5890	4800	6084	37.0	14.4	79.5	18.1	60.4	36.0	27.6	28.6	41.0	32.2	12.4	77.2	16.1	55.6	32.3	25.2	26.2	36.1
9200 lb. **LMM & X88** LT265/70R17 at 50 PSI Rear	4090	2496	6586	4800	6084	36.9	14.6	79.3	18.0	60.4	35.9	27.5	28.4	40.9	32.0	13.8	77.6	16.7	55.4	32.3	26.0	26.5	35.8
9200 lb. **LMM & Z88** LT265/70R17 at 50 PSI Rear	4090	2496	6586	4800	6084	36.9	14.2	79.3	18.0	60.4	35.9	27.5	28.4	40.9	32.0	13.4	77.6	16.7	55.4	32.3	26.0	26.5	35.8

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

C/K 30000 Fullsize Pickups & Chassis-Cabs

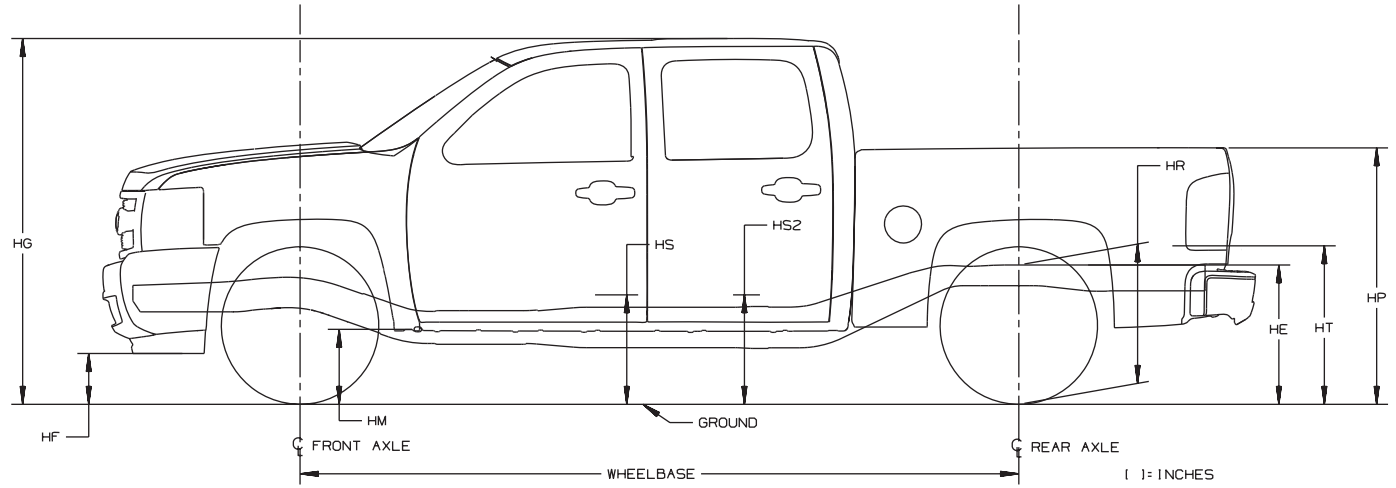

ANC35219.3

Heights (To Ground)

HE ..... **Top of Frame Rail at End**

HF ..... **Bottom of Front Air Deflector or Bumper**

HG ..... **Roof Height**

HM ..... **Chassis Datum Hole**

HP ..... **Top of Tailgate**

HR ..... **Top of Frame at Centerline of Rear Axle**

HS ..... **Step H-Point-Front**

HS2 ..... **Step H-Point-Second**

HT ..... **Rear Cargo Load Height**

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

C 30903	133.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9700 lb. **LY6 & X88** LT265/70R17	3067	2410	5477	4200	6500	37.4	14.9	79.0	18.5	60.9	36.2	28.2	29.0	41.5	31.3	13.8	76.3	16.4	54.7	31.6	25.6	25.8	35.1
9700 lb. **LY6 & Z88** LT265/70R17 at 60 PSI Rear	3067	2410	5477	4200	6500	37.4	14.4	79.0	18.5	60.9	36.2	28.2	29.0	41.5	31.3	13.3	76.3	16.4	54.7	31.6	25.6	25.8	35.1

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

C 30953	157.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9900 lb. **LY6 & X88** LT265/70R17 at 60 PSI Rear	3190	2610	5800	4800	6500	36.9	15.0	78.9	18.3	60.3	35.9	27.8	28.4	40.9	31.4	12.8	76.2	15.8	54.8	31.6	25.1	25.5	35.2
9900 lb. **LY6 & Z88** LT265/70R17 at 60 PSI Rear	3190	2610	5800	4800	6500	36.9	14.6	78.9	18.3	60.3	35.9	27.8	28.4	40.9	31.4	12.4	76.2	15.8	54.8	31.6	25.1	25.5	35.2
11400 lb. **LY6 & X88** LT225/75R17 at 65 PSI Rear	3252	2781	6033	4800	8200	36.8	14.2	78.4	17.7	60.3	35.7	27.3	28.0	40.9	30.3	12.4	75.2	15.0	53.7	30.7	24.2	24.4	34.1
11400 lb. **LY6 & Z88** LT225/75R17 at 65 PSI Rear	3252	2781	6033	4800	8200	36.8	13.8	78.4	17.7	60.3	35.7	27.3	28.0	40.9	30.3	12.0	75.2	15.0	53.7	30.7	24.2	24.4	34.1
11400 lb. **LMM & X88** LT225/75R17 at 65 PSI Rear	3840	2850	6690	4800	8200	36.7	14.0	78.3	17.5	60.2	35.6	27.2	27.9	40.8	30.1	13.3	75.6	15.6	53.5	30.7	24.6	24.8	33.9
11400 lb. **LMM & Z88** LT225/75R17 at 65 PSI Rear	3840	2850	6690	4800	8200	36.7	13.6	78.3	17.5	60.2	35.6	27.2	27.9	40.8	30.1	12.9	75.6	15.6	53.5	30.7	24.6	24.8	33.9

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

C 30943	167.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9900 lb. **LY6 & X88** LT265/70R17 at 60 PSI Rear	3224	2638	5862	4800	6500	36.8	15.1	79.5	18.2	60.2	35.9	27.7	28.5	40.8	31.4	12.9	76.7	15.8	54.8	31.6	25.1	25.7	35.2
9900 lb. **LY6 & Z88** LT265/70R17 at 60 PSI Rear	3224	2638	5862	4800	6500	36.8	14.6	79.5	18.2	60.2	35.9	27.7	28.5	40.8	31.4	12.4	76.7	15.8	54.8	31.6	25.1	25.7	35.2
11400 lb. **LY6 & X88** LT225/75R17 at 65 PSI Rear	3293	2862	6155	4800	8200	36.6	14.3	79.0	17.6	60.1	35.6	27.1	28.1	40.7	30.3	12.5	75.6	15.1	53.7	30.7	24.2	24.5	34.1
11400 lb. **LY6 & Z88** LT225/75R17 at 65 PSI Rear	3293	2862	6155	4800	8200	36.6	13.8	79.0	17.6	60.1	35.6	27.1	28.1	40.7	30.3	12.0	75.6	15.1	53.7	30.7	24.2	24.5	34.1
11400 lb. **LMM & X88** LT225/75R17 at 65 PSI Rear	3853	2919	6772	4800	8200	36.5	14.1	78.9	17.5	60.0	35.5	27.0	28.0	40.6	30.2	13.3	76.0	15.6	53.5	30.7	24.6	24.9	33.9
11400 lb. **LMM & Z88** LT225/75R17 at 65 PSI Rear	3853	2919	6772	4800	8200	36.5	13.7	78.9	17.5	60.0	35.5	27.0	28.0	40.6	30.2	12.9	76.0	15.6	53.5	30.7	24.6	24.9	33.9

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

K 30903	133.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9900 lb. **LY6 & X88** LT265/70R17 at 60 PSI Rear	3165	2368	5533	4800	6500	37.5	14.8	79.0	18.4	60.9	36.2	28.2	29.0	41.6	31.4	12.6	76.1	15.9	54.8	31.6	25.3	25.8	35.2
9900 lb. **LY6 & Z88** LT265/70R17 at 60 PSI Rear	3165	2368	5533	4800	6500	37.5	14.4	79.0	18.4	60.9	36.2	28.2	29.0	41.6	31.4	12.2	76.1	15.9	54.8	31.6	25.3	25.8	35.2
9900 lb. **LMM & X88** LT265/70R17 at 60 PSI Rear	3752	2429	6181	4800	6500	37.4	14.6	78.9	18.3	60.9	36.2	28.0	28.9	41.5	31.1	13.5	76.5	16.4	54.5	31.6	25.7	26.1	34.9
9900 lb. **LMM & Z88** LT265/70R17 at 60 PSI Rear	3752	2429	6181	4800	6500	37.4	14.2	78.9	18.3	60.9	36.2	28.0	28.9	41.5	31.1	13.1	76.5	16.4	54.5	31.6	25.7	26.1	34.9
11400 lb. **LY6 & X88** LT225/75R17 at 65 PSI Rear	3259	2634	5893	4800	8200	37.2	14.0	78.5	17.8	60.7	35.9	27.6	–	41.4	30.3	12.3	75.1	15.1	53.7	30.7	24.3	–	34.1
11400 lb. **LY6 & Z88** LT225/75R17 at 65 PSI Rear	3259	2634	5893	4800	8200	37.2	13.6	78.5	17.8	60.7	35.9	27.6	–	41.4	30.3	11.9	75.1	15.1	53.7	30.7	24.3	–	34.1
11400 lb. **LMM & X88** LT225/75R17 at 65 PSI Rear	3846	2695	6541	4800	8200	37.2	13.8	78.4	17.7	60.7	35.8	27.5	–	41.3	30.0	13.3	75.4	15.7	53.4	30.7	24.7	–	33.8
11400 lb. **LMM & Z88** LT225/75R17 at 65 PSI Rear	3846	2695	6541	4800	8200	37.2	13.4	78.4	17.7	60.7	35.8	27.5	–	41.3	30.0	12.8	75.4	15.7	53.4	30.7	24.7	–	33.8

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

K 30953	157.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9900 lb. **LY6 & X88** LT265/70R17 at 60 PSI Rear	3402	2535	5937	4800	6500	37.0	14.9	78.9	18.2	60.5	36.0	27.8	28.5	41.1	31.3	13.1	76.3	16.0	54.7	31.6	25.3	25.7	35.1
9900 lb. **LY6 & Z88** LT265/70R17 at 60 PSI Rear	3402	2535	5937	4800	6500	37.0	14.5	78.9	18.2	60.5	36.0	27.8	28.5	41.1	31.3	12.7	76.3	16.0	54.7	31.6	25.3	25.7	35.1
9900 lb. **LMM & X88** LT265/70R17 at 60 PSI Rear	4001	2601	6602	4800	6500	36.9	14.7	78.8	18.1	60.4	35.9	27.7	28.4	41.0	31.1	14.0	76.7	16.6	54.5	31.6	25.8	26.0	34.9
9900 lb. **LMM & Z88** LT265/75R17 at 60 PSI Rear	4001	2601	6602	4800	6500	36.9	14.3	78.8	18.1	60.4	35.9	27.7	28.4	41.0	31.1	13.6	76.7	16.6	54.5	31.6	25.8	26.0	34.9
11400 lb. **LMM & X88** LT225/75R17 at 65 PSI Rear	4094	2868	6962	4800	8200	36.7	14.0	78.3	17.5	60.2	35.6	27.1	27.9	40.8	30.1	13.7	75.7	15.9	53.4	30.7	24.8	25.0	33.8
11400 lb. **LMM & Z88** LT225/75R17 at 65 PSI Rear	4094	2868	6962	4800	8200	36.7	13.5	78.3	17.5	60.2	35.6	27.1	27.9	40.8	30.1	13.2	75.7	15.9	53.4	30.7	24.8	25.0	33.8

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

K 30943	167.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9900 lb. **LY6 & X88** LT265/70R17 at 60 PSI Rear	3474	2621	6095	4800	6500	36.8	15.0	79.4	18.2	60.3	35.9	27.7	28.5	40.9	31.3	13.2	76.9	16.1	54.7	31.6	25.3	25.8	35.1
9900 lb. **LY6 & Z88** LT265/70R17 at 60 PSI Rear	3474	2621	6095	4800	6500	36.8	14.5	79.4	18.2	60.3	35.9	27.7	28.5	40.9	31.3	12.8	76.9	16.1	54.7	31.6	25.3	25.8	35.1
11400 lb. **LY6 & X88** LT225/75R17 at 65 PSI Rear	3564	2892	6456	4800	8200	36.6	14.2	78.9	17.5	60.0	35.6	27.1	28.0	40.6	30.3	12.9	75.8	15.3	53.7	30.7	24.4	24.7	33.8
11400 lb. **LY6 & Z88** LT225/75R17 at 65 PSI Rear	3564	2892	6456	4800	8200	36.6	13.8	78.9	17.5	60.0	35.6	27.1	28.0	40.6	30.3	12.5	75.8	15.3	53.7	30.7	24.4	24.7	33.8
11400 lb. **LMM** LT225/75R17	4150	2956	7106	4800	8200	36.5	14.0	13.6	78.8	17.4	60.0	35.5	27.0	27.9	30.1	13.7	13.3	76.2	15.9	53.4	30.7	24.9	25.0

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

C/K 31000 Fullsize Chassis-Cabs

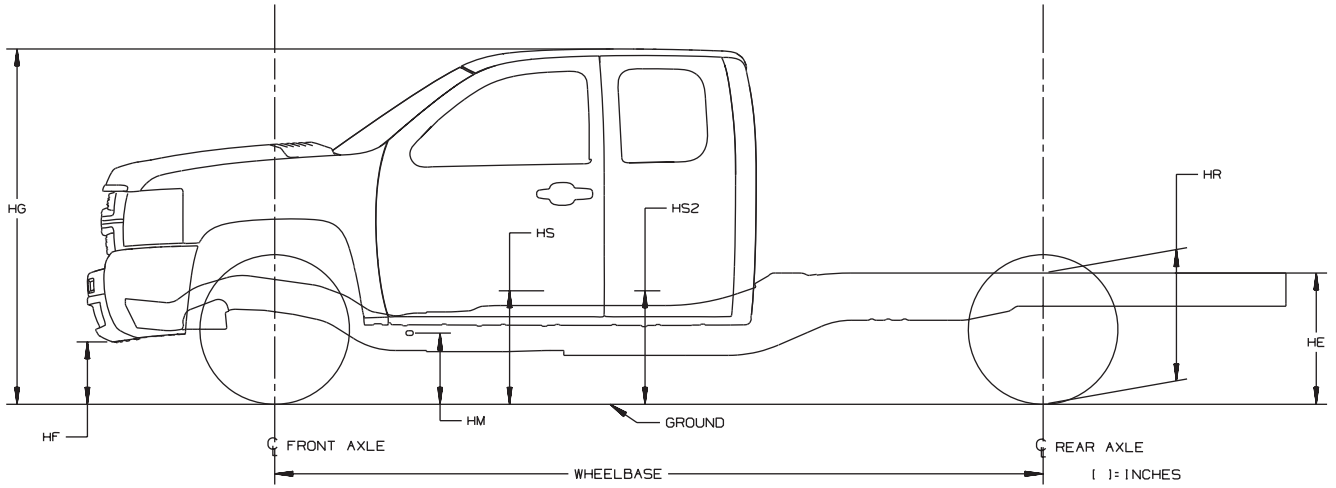

ANC35219.4

Heights (To Ground)

HE ..... **Top of Frame Rail at End**

HF ..... **Bottom of Front Air Deflector or Bumper**

HG ..... **Roof Height**

HM ..... **Chassis Datum Hole**

HR ..... **Top of Frame at Centerline of Rear Axle**

HS ..... **Step H-Point-Front**

HS2 ..... **Step H-Point-Second**

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

C 31003	137.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
11400 lb. **LY6 & X88** LT215/85R16 at 65 PSI Rear	3156	2323	5479	4500	8600	35.5	14.0	78.5	17.9	–	33.9	27.7	–	–	28.6	12.4	75.5	15.4	–	29.0	24.7	–	–
11400 lb. **LY6 & Z88** LT215/85R16 at 65 PSI Rear	3156	2323	5479	4500	8600	35.5	13.6	78.5	17.9	–	33.9	27.7	–	–	28.6	12.0	75.5	15.4	–	29.0	24.7	–	–
11400 lb. **LMM & X88** LT215/85R16 at 65 PSI Rear	3655	2376	6031	4500	8600	35.4	13.9	78.4	17.8	–	33.8	27.6	–	–	28.3	13.2	75.8	15.9	–	29.0	25.1	–	–
11400 lb. **LMM & Z88** LT215/85R16 at 65 PSI Rear	3655	2376	6031	4500	8600	35.4	13.5	78.4	17.8	–	33.8	27.6	–	–	28.3	12.8	75.8	15.9	–	29.0	25.1	–	–

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

C 31053	161.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
11400 lb. **LY6 & X88** LT215/85R16 at 70 PSI Rear	3377	2589	5966	4800	8600	34.6	14.3	78.4	17.7	–	33.4	27.2	28.0	–	27.5	12.5	75.1	15.1	–	28.2	24.2	24.4	–
11400 lb. **LY6 & Z88** LT215/85R16 at 70 PSI Rear	3377	2589	5966	4800	8600	34.6	13.9	78.4	17.7	–	33.4	27.2	28.0	–	27.5	12.0	75.1	15.1	–	28.2	24.2	24.4	–
11400 lb. **LMM & X88** LT215/85R16 at 70 PSI Rear	3965	2655	6620	4800	8600	34.5	14.1	78.2	17.5	–	33.3	27.1	27.9	–	27.2	13.4	75.6	15.7	–	28.2	24.7	24.8	–
11400 lb. **LMM & Z88** LT215/85R16 at 70 PSI Rear	3965	2655	6620	4800	8600	34.5	13.7	78.2	17.5	–	33.3	27.1	27.9	–	27.2	13.0	75.6	15.7	–	28.2	24.7	24.8	–

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

C 31403	161.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
11400 lb. **LY6 & X88** LT215/85R16 at 70 PSI Rear	3269	2300	5569	4800	8600	35.3	14.2	78.3	17.8	–	33.9	27.4	–	–	27.5	12.3	74.8	15.0	–	28.2	24.1	–	–
11400 lb. **LY6 & Z88** LT215/85R16 at 70 PSI Rear	3269	2300	5569	4800	8600	35.3	13.8	78.3	17.8	–	33.9	27.4	–	–	27.5	11.8	74.8	15.0	–	28.2	24.1	–	–
11400 lb. **LMM & X88** LT215/85R16 at 70 PSI Rear	3764	2357	6121	4800	8600	35.2	14.1	78.2	17.7	–	33.8	27.3	–	–	27.3	13.1	75.3	15.5	–	28.2	24.5	–	–
11400 lb. **LMM & Z88** LT215/85R16 at 70 PSI Rear	3764	2357	6121	4800	8600	35.2	13.6	78.2	17.7	–	33.8	27.3	–	–	27.3	12.7	75.3	15.5	–	28.2	24.5	–	–

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

K 31003	137.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
12000 lb. **LY6 & X88** LT215/85R16 at 70 PSI Rear	3403	2375	5778	4800	8600	35.4	14.0	78.5	17.9	–	33.8	27.6	–	–	28.8	12.3	75.3	15.3	–	29.0	24.6	–	–
12000 lb. **LY6 & Z88** LT215/85R16 at 70 PSI Rear	3403	2375	5778	4800	8600	35.4	13.6	78.5	17.9	–	33.8	27.6	–	–	28.8	11.9	75.3	15.3	–	29.0	24.6	–	–
12000 lb. **LMM & X88** LT215/85R16 at 70 PSI Rear	3996	2439	6435	4800	8600	35.3	13.9	78.4	17.7	–	33.7	27.5	–	–	28.5	13.3	75.8	15.9	–	29.0	25.0	–	–
12000 lb. **LMM & Z88** LT215/85R16 at 70 PSI Rear	3996	2439	6435	4800	8600	35.3	13.4	78.4	17.7	–	33.7	27.5	–	–	28.5	12.9	75.8	15.9	–	29.0	25.0	–	–

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

K 31053	161.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
12000 lb. **LY6 & X88** LT215/85R16 at 70 PSI Rear	3695	2610	6305	4800	8600	34.6	14.2	78.3	17.6	–	33.4	27.2	27.9	–	27.6	13.0	75.3	15.4	–	28.2	24.4	24.5	–
12000 lb. **LY6 & Z88** LT215/85R16 at 70 PSI Rear	3695	2610	6305	4800	8600	34.6	13.8	78.3	17.6	–	33.4	27.2	27.9	–	27.6	12.6	75.3	15.4	–	28.2	24.4	24.5	–
12000 lb. **LMM & X88** LT215/85R16 at 70 PSI Rear	4293	2676	6969	4800	8600	34.5	14.0	78.2	17.5	–	33.3	27.0	27.8	–	27.4	14.0	75.7	16.0	–	28.2	24.9	24.9	–
12000 lb. **LMM & Z88** LT215/85R16 at 70 PSI Rear	4293	2676	6969	4800	8600	34.5	13.6	78.2	17.5	–	33.3	27.0	27.8	–	27.4	13.6	75.7	16.0	–	28.2	24.9	24.9	–

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

C 31403	161.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
12000 lb. **LY6 & X88** LT215/85R16 at 70 PSI Rear	3467	2419	5886	4800	8600	35.0	14.2	78.2	17.7	–	33.7	27.3	–	–	27.7	12.7	74.9	15.1	–	28.2	24.2	–	–
12000 lb. **LY6 & Z88** LT215/85R16 at 70 PSI Rear	3467	2419	5886	4800	8600	35.0	13.8	78.2	17.7	–	33.7	27.3	–	–	27.7	12.2	74.9	15.1	–	28.2	24.2	–	–
12000 lb. **LMM & X88** LT215/85R16 at 70 PSI Rear	4057	2487	6544	4800	8600	34.9	14.0	78.0	17.6	–	33.6	27.2	–	–	27.5	13.6	75.4	15.8	–	28.2	24.7	–	–
12000 lb. **LMM & Z88** LT215/85R16 at 70 PSI Rear	4057	2487	6544	4800	8600	34.9	13.6	78.0	17.6	–	33.6	27.2	–	–	27.5	13.2	75.4	15.8	–	28.2	24.7	–	–

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

G/H Van - Full Body

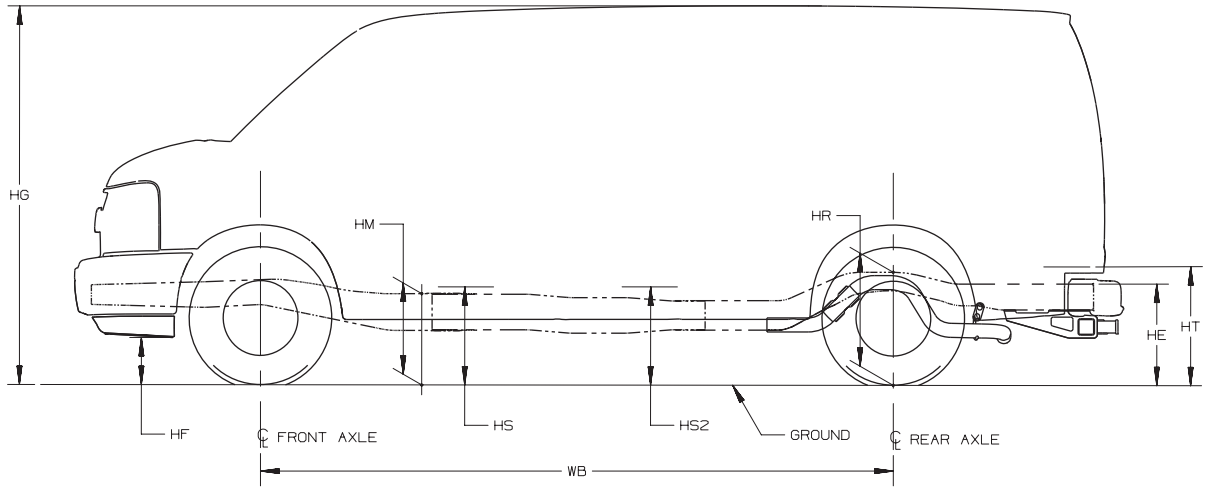

TD006028a

Heights (To Ground)

HE ..... **Top of Frame at End**

HF ..... **Bottom of Front Air Deflector or Bumper**

HG ..... **Roof Height**

HM ..... **Normal Top of Frame**

HR ..... **Top of Frame at Centerline of Rear Axle**

HS ..... **Step H-Point-Front**

HS2 ..... **Step H-Point-Second**

HT ..... **Rear Cargo Load Height**

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

G 13405	135.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[2] 7200 P245/75R16	2669	2147	4817	3600	4000	–	15.7	81.5	17.9	–	24.9	18.2	18.8	26.4	–	14.1	79.6	16.2	–	23.3	16.4	16.8	23.3
[2] 7200 LT245/75R16	2669	2147	4817	3600	4000	–	15.7	81.5	17.9	–	24.9	18.2	18.8	26.4	–	14.1	79.6	16.2	–	23.3	16.4	16.8	23.3

G 13406	135.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 7200 P245/75R16	2772	2465	5237	3600	4000	–	15.5	81.4	17.8	–	24.8	18.1	18.7	26.3	–	14.0	79.5	16.1	–	22.2	16.3	16.7	23.2
[1] 7200 LT245/75R16	2772	2465	5237	3600	4000	–	15.5	81.4	17.8	–	24.8	18.1	18.7	26.3	–	14.0	79.5	16.1	–	22.2	16.3	16.7	23.2

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

H 13405	135.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 7300 P245/75R16	2904	2026	4930	3600	4000	–	15.2	82.2	18.0	–	25.7	18.2	19.2	27.4	–	14.2	79.6	16.2	–	22.3	16.4	16.8	23.2
[1] 7300 LT245/75R16	2904	2026	4930	3600	4000	–	15.2	82.2	18.0	–	25.7	18.2	19.2	27.4	–	14.2	79.6	16.2	–	22.3	16.4	16.8	23.2

H 13406	135.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 7300 P245/75R16	3004	2442	5446	3600	4000	–	15.3	81.4	17.7	–	24.9	18.0	18.7	26.4	–	14.4	79.6	16.3	–	22.2	16.5	16.9	23.1
[1] 7300 LT245/75R16	3004	2442	5446	3600	4000	–	15.3	81.4	17.7	–	24.9	18.0	18.7	26.4	–	14.4	79.6	16.3	–	22.2	16.5	16.9	23.1

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

G 23405	135.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[2] 8600 LT245/75R16	2806	2790	5596	4100	5360	—	16.8	83.1	19.3	—	26.6	19.5	20.3	28.2	—	14.4	81.6	17.3	—	24.4	17.5	18.5	25.4
[2] 8600 LT225/75R16	2909	2260	5169	4100	5360	—	16.5	83.4	19.3	—	26.9	19.5	20.4	28.6	—	14.5	80.9	17.1	—	23.8	17.3	18.1	24.7

G 23406	135.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 8600 **KL6** LT245/75R16	3006	3118	6124	4100	5360	—	17.2	82.8	19.4	—	26.2	19.6	20.1	27.5	—	15.1	81.6	17.7	—	24.4	17.9	18.8	25.3
[2] 8600 LT225/75R16	3116	2597	5713	4100	5360	—	16.5	82.8	19.0	—	26.3	19.2	20.0	27.9	—	14.8	81.0	17.3	—	23.8	17.5	18.2	24.7
[2] 8600 **& LLY** LT225/75R16	3640	2631	6271	4100	5360	—	16.4	82.7	18.9	—	26.3	19.1	19.9	27.8	—	16.0	81.2	18.0	—	23.8	18.2	18.6	24.5
[2] 8600 **& LLY** LT245/75R16	3640	2631	6271	4100	5360	—	16.8	83.3	19.4	—	26.8	19.7	20.5	28.4	—	16.5	81.8	18.5	—	24.4	18.7	19.1	25.1

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

G 23705	155.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[2] 8600 LT245/75R16	3074	2230	5304	4300	5360	—	17.0	83.9	19.7	—	27.5	19.9	20.8	29.2	—	15.0	81.6	17.6	—	24.3	17.8	18.6	25.3

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

G 33405	135.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 9600 LT245/75R16	2935	2270	5205	4300	6084	–	17.0	84.1	19.7	–	27.6	20.1	21.1	29.4	–	14.9	81.3	17.4	–	24.3	17.7	18.5	25.3

G 33406	135.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 9600 LT245/75R16	3065	2528	5593	4300	6084	–	17.0	83.9	19.7	–	27.5	19.9	20.8	29.1	–	15.0	81.4	17.5	–	24.2	17.7	18.5	25.3

G 33705	155.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 9600 LT245/75R16	3042	2376	5418	4300	6084	–	17.0	83.6	19.6	–	27.2	19.9	20.8	28.8	–	15.1	81.3	17.4	–	24.3	17.7	18.4	25.3

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

G 33706	155.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 9600 LT245/75R16	3258	2605	5863	4300	6084	—	17.0	83.6	19.7	—	27.2	19.8	20.6	28.8	—	15.4	81.4	17.8	—	24.3	17.9	18.6	25.3

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

G/H Van - Fullsize Cutaway

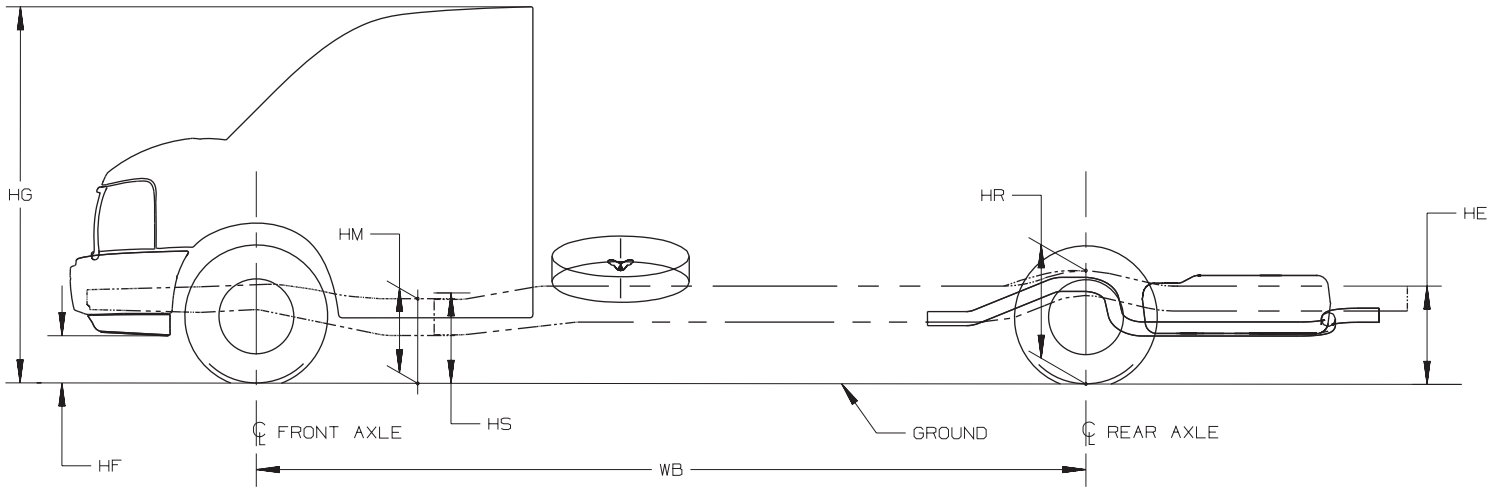

TD006028b

Heights (To Ground)

HE ..... **Top of Frame at End**

HF ..... **Bottom of Front Air Deflector or Bumper**

HG ..... **Roof Height**

HM ..... **Normal Top of Frame**

HR ..... **Top of Frame at Centerline of Rear Axle**

HS ..... **Step H-Point-Front**

HS2 ..... **Step H-Point-Second**

HT ..... **Rear Cargo Load Height**

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

G 33503	139.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[2] 9600 LT245/75R16	2915	1550	4465	4100	6084	28.9	16.5	83.6	24.8	–	30.0	20.7	–	–	25.1	14.6	81.7	22.5	–	27.0	18.5	–	–
[2] 12,300 LT225/75R16	3005	1919	4924	4300	8600	28.4	16.0	83.0	24.3	–	29.4	20.2	–	–	22.7	14.2	80.6	21.1	–	25.3	17.5	–	–

G 33803	159.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[2] 12,300 **& YF1** LT225/75R16	3064	1714	4778	4300	8600	28.1	16.2	82.9	24.0	–	29.5	20.1	–	–	22.4	14.5	80.7	21.0	–	25.2	17.6	–	–
[2] 14,050 LT225/75R16	3062	1723	4785	4600	9450	28.0	16.9	83.3	24.3	–	29.6	20.5	–	–	22.3	15.2	80.3	20.9	–	25.0	17.8	–	–

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

G 33903	177.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[2] 12,300 **& YF1** LT225/75R16	3051	1774	4825	4300	8600	28.2	16.5	83.0	24.0	—	29.7	20.2	—	—	23.5	14.8	81.1	21.4	—	26.1	17.9	—	—

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

U/X Crossover Sport Van

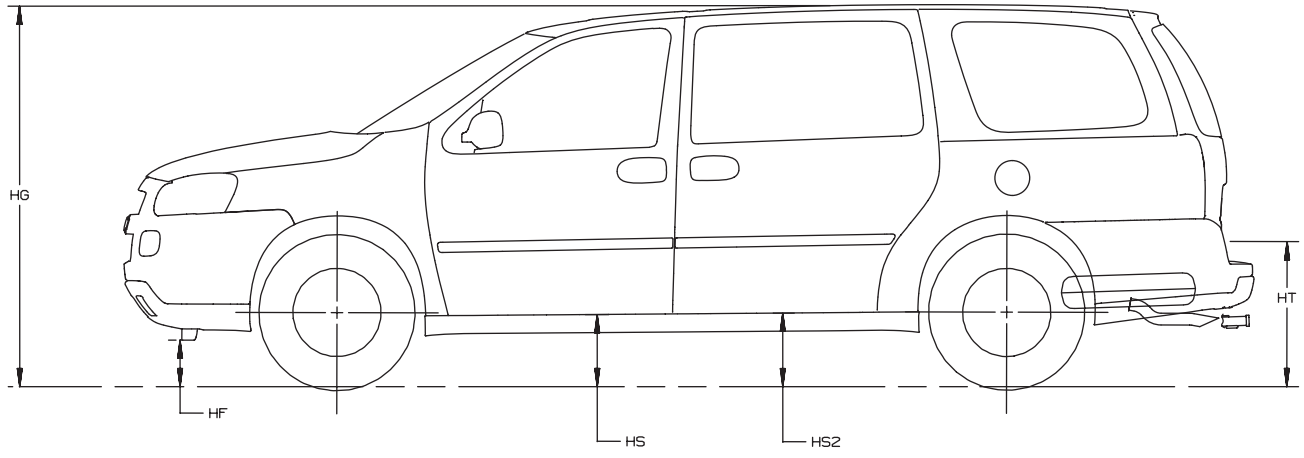

ANB01673c

Heights (To Ground)

HE ..... **Top of Frame at End**

HF ..... **Bottom of Front Air Deflector or Bumper**

HG ..... **Roof Height**

HM ..... **Normal Top of Frame**

HR ..... **Top of Frame at Centerline of Rear Axle**

HS ..... **Step H-Point-Front**

HS2 ..... **Step H-Point-Second**

HT ..... **Rear Cargo Load Height**

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

U 11416	113.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
5622 P225/60R17	2359	1823	4183	2866	2756	–	7.2	68.1	–	–	–	16.6	19.3	24.7	–	7.1	65.2	–	–	–	15.0	16.7	20.7
5622 **& G67** P225/60R17	2359	1823	4183	2866	2756	–	7.2	68.1	–	–	–	16.6	19.3	24.7	–	6.6	66.9	–	–	–	15.7	18.1	23.1

U 12216	121.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 5622 P225/60R17	2318	1854	4172	2866	2756	–	7.4	68.2	–	–	–	16.7	19.4	25.2	–	4.8	65.7	–	–	–	14.1	15.9	19.3
[1] 5622 **& G67** P225/60R17	2318	1854	4172	2866	2756	–	7.4	68.2	–	–	–	16.7	19.4	25.2	–	4.4	67.0	–	–	–	14.7	18.0	23.8
[2] 5622 **& FE1 & Y3G/Y3H/Z10** P225/60R17	2318	1854	4172	2866	2756	–	7.3	68.5	–	–	–	16.8	19.6	25.5	–	4.7	66.0	–	–	–	14.2	16.1	19.7
[2] 5622 **& FE3 & Y3G/Y3H/Z10** P225/60R17	2318	1854	4172	2866	2756	–	7.3	68.5	–	–	–	16.8	19.7	25.6	–	4.7	66.0	–	–	–	14.3	16.1	19.7
[2] 5622 **& G67 & FE3 & Y3G/Y3H/Z10** P225/60R17	2318	1854	4172	2866	2756	–	7.3	68.5	–	–	–	16.8	19.7	25.6	–	4.5	67.0	–	–	–	14.6	17.9	23.7
[2] 5842 **& W49 & G67** P225/60R17	2318	1854	4172	2866	3006	–	7.3	68.3	–	–	–	16.7	19.5	25.4	–	4.2	66.9	–	–	–	14.5	17.8	23.9

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model